


## Assembly Instructions for ER14-1-LAM

1. Place the bottom of the rack on the floor and screw in the Connecting Bolts using a #3 phillips screw driver or flat blade screw driver. The large hole goes to the rear of the rack.
2. Attach rack side.  
(Note: Alignment Arrow on Cam should be pointing to the edge of the rack with holes)

Optional: Apply a bead of Roo glue along the bottom edge of the rack side. Glue makes the joint permanent, but is not necessary for assembly.  
CAUTION: The Roo glue is water soluble while wet, but it will not come out of clothing. Take precautions to avoid getting glue on clothing or carpets.

Place over the connecting bolts. Be sure that the adjustable rails are to the rear of the rack. Tighten the Cams using the 6mm allen wrench.

3. Repeat step 2 for the other side.
4. Attach Rack Top. Screw the Connecting Bolts into the bottom of the Rack Top. Place the top over the connecting pins. Tighten the cams.
5. Turn the rack upside down and attach the casters using a #2 phillips screwdriver.

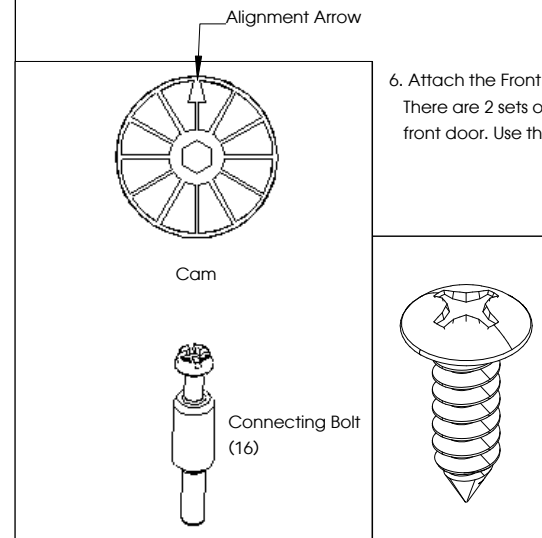

6. Attach the Front Rack Rails using the #14 x 3/4" Screws (4 each). There are 2 sets of mounting holes. Use the rear set if attaching a front door. Use the front set if no front door.

#14 x 3/4" Screws.  
(16) for Caster Attachment  
(8) for Front Rack Rail Attachment